Air Bag System Quick Setup

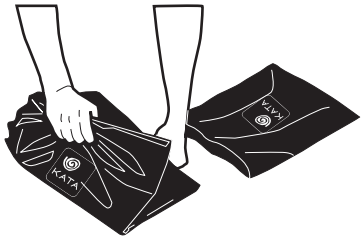

1. Take air bag out of carrying pouch and unfold yellow side up.

2. Manually inflate air bag halfway using inflation tube.

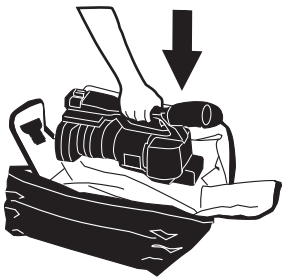

3. Place camcorder inside bag taking note of the lens direction.

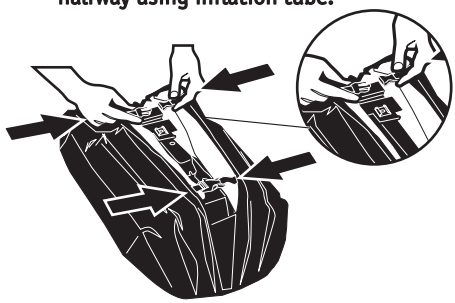

4. Loosely close bag and close the two top buckles.

5. Zip bag up enough to leave either the camcorder handle or carrying strap easily accessible. Inflate to roughly 75% capacity for flight. Air bag can be fully inflated at cruising altitude.

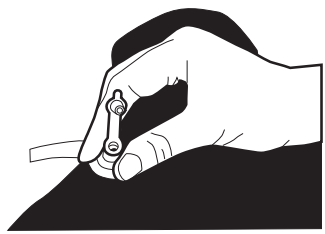

To deflate, open stopper near inflation tube base.
Roll up to release air and fold into carrying pouch.

Note: Due to changes in cabin pressure during flight, upon landing the Air Bag may appear noticeably smaller. This however will not degredate the protection of the Air Bag during flight nor indicate that there is a leak in the bag.